

Beam Clamp w/Hoisting Eye


IPTK



This IPTK series beam clamp is suitable for use as a temporary tackle eye for a beam.

For the Transfer of Steel Beams and Attachment of Tackle Eye

- Available in capacities of 2 thru 25 metric tons.
- Wide variety of jaw openings available: 3" to 40".
- Welded alloy steel body for strength and smaller size. Forged alloy components, where required.
- Individually Proof Tested to 2 times the Working Load Limit with certification.
- Company name (IP), logo, Working Load Limit and jaw opening permanently stamped on body.
- Each product is individually serialized, with the serial number and Proof Load test date stamped on body. Serial number is included on the test certificate with maintenance and warranty logbook.
- Maintenance replacement parts are available.
- Manufactured by a ISO 9001 facility.
- All sizes are **RFID EQUIPPED**.

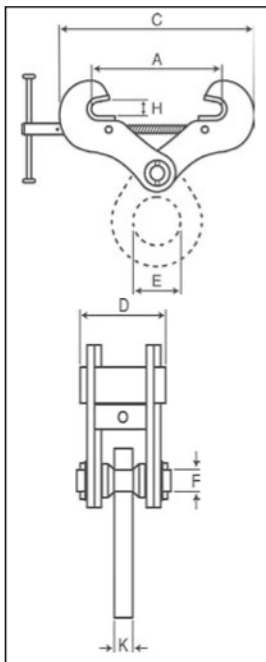

Model IPTKW: without Hoisting Eye

| Model | Working Load Limit (t)* | Stock No. | Weight Each (lbs.) | Dimensions (in.) | | | | | | |
|-------|-------------------------|-----------|--------------------|------------------|-----------|-------|------|---|------|------|
| | | | | Jaw A | C | D | E | F | H | K |
| IPTK | 2 | 2700996 | 13.2 | 3.00 - 7.50 | A + 3.13 | 4.92 | 2.95 | - | .98 | .79 |
| IPTK | 3 | 2700997 | 14.3 | 3.00 - 7.50 | A + 3.13 | 4.92 | 2.95 | - | .98 | .79 |
| IPTK | 4 | 2700998 | 18.7 | 5.88 - 11.25 | A + 4.00 | 4.92 | 2.95 | - | 1.38 | .79 |
| IPTK | 5 | 2700994 | 24.3 | 4.75 - 13.75 | A + 7.67 | 4.92 | 2.95 | - | 1.57 | .79 |
| IPTK | 10 | 2700970 | 68.3 | 11.75 - 19.70 | A + 11.75 | 6.98 | 2.91 | - | 1.57 | 1.18 |
| IPTK | 25 | 2702999 | 496 | 18.00 - 40.00 | A + 8.66 | 19.69 | 4.92 | - | 2.99 | 1.77 |

* Design Factor based on EN 13155 and ASME B30.20.

Load Rated